

1500ct Pump Controller



Dynamic Solutions for greater control
and true dynamic I/O, color, touch
screen interface

Details

Telemetry Ready

With the addition of a radio, cellular modem, or leased phone line, the 1500ct allows you to monitor station status, change pump start and stop set points, change high- and low-level alarm set points, acknowledge alarms, and view pump run, fail, and performance information remotely.

Adaptable

The 1500ct is an “open” control platform supporting industry standard communication protocols like Modbus and DF1. This open protocol approach allows the 1500ct to be readily integrated into most new or existing SCADA systems. Two serial communication ports and an optional Ethernet port allow for redundant telemetry networks.


Versatile

The 1500ct can be used to control and monitor up to three constant and / or variable speed pumps in either pump up or pump down mode. This versatility makes the 1500ct able to control even difficult pump applications like pressure / flow-controlled applications.


Cellular Remote Control

Enables operator to receive controller status and acknowledge alarms via cellular text messaging.

1500ct Home Screen

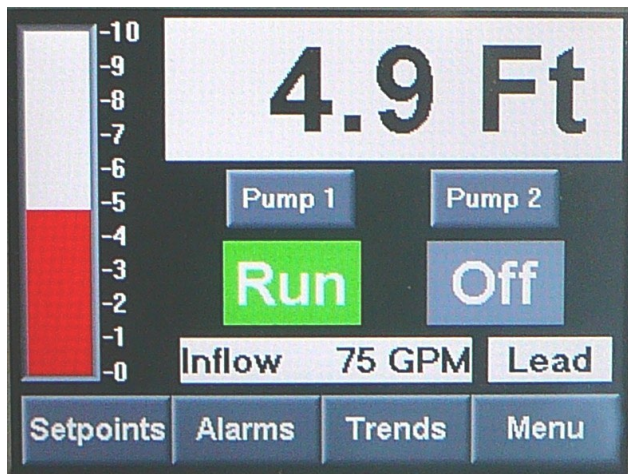

Main Menu Screen

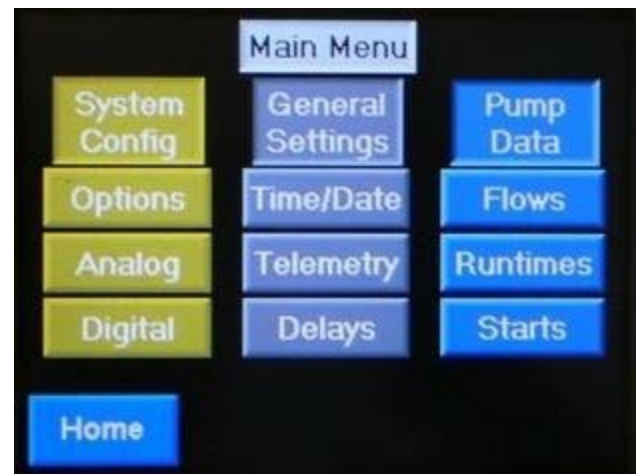

Feature Summary

- Large 5.7 inch touch screen Color LCD Display
- Pump Control
- Historical Trend Data
- Alarm/Event Log
- Dynamic I/O
- Communicates with virtually all PLCs/SCADA Systems
- VFD Control
- Security; multi-level
- Communication Protocols
 - MODBUS
 - Remote Access Utilities
 - Ethernet via TCP/IP
 - GPRS/GSM/SMS Support
 - DF1
 - OPC Server/DDE Server



Individual Pump Data Screen

Pump Run Data

- Total runtime
- Total pump flow
- Total number of starts
- Eight continuous days of data

Pump 1	Runtime	Flow	Starts
Today	0.1 Hrs	1.5(KGal)	50
Monday	7.8 Hrs	3.5(KGal)	27
Tuesday	0.8 Hrs	3.6(KGal)	17
Wednesday	1.1 Hrs	4.8(KGal)	20
Thursday	1.0 Hrs	4.1(KGal)	19
Friday	0.9 Hrs	4.2(KGal)	18
Saturday	0.3 Hrs	5.1(KGal)	23
Sunday	1.1 Hrs	5.6(KGal)	38
Total	9.1 Hrs	77897(KGal)	259

Home

Calculated Flow Statistics

- Total station flow
- Average daily flow
- Maximum daily flow



Trend Data

- The controller will trend station flow, wet well level, and pump flow performance with-out a flow meter.
- Pump trend data is available for one year.

Volumetric Flow Calculation

- The controller can calculate station flows.

Alarm Control

- Easily silence audible alarms and reset latching alarm conditions.

Pump Protection

- The 1500ct controller will detect failed pumps, and take the failed pump out of service until the failure condition is corrected and reset.

Time and Date

- Alarm Event Log stores the last 1000 alarm events.

Priority	High	Alarm History	ESC
Group	00	General Collection	
ID	016	Pump 1 Fail to Start	
Trigger Rise Time	01/11/09 20:37	Duration	
Trigger Fall Time	01/11/09 20:37	00:00:05	
Ack. Time	00/00/00 00:00		
Reset Time	00/00/00 00:00		

... Informative Data; Custom tailored for any Pump Station...

I/O Module

The 1500ct Supports a Wide Variety of Communication Media

- Ethernet
- Radio (UHF, VHF, Spread Spectrum, Cellular)
- Phone line

2 Serial ports, Supports MODBUS, and DF1

- Optional Ethernet port

24 Volt DC Operation

- Easy to back-up DC power supply with standard batteries

Diagnostics

- Troubleshoot via the HMI panel- no PC needed

Pull-Apart Terminal Blocks

- For ease of installation & maintenance

Alternation

- The 1500ct supports multiple modes of operation, configurable through the touch screen



VFD Control and Ramps

- Control and scale Analog Outputs for virtually any use

... Versatile; Allows for control of any Pumping application...



Irrigation Pump Station

Controls pumps based on local discharge pressure or flow rate.



Transfer Pump Station

Controls pumps based on locally monitored wet well level. Supports both level transmitter and float switch control inputs for primary and back up control.




Booster Pump Station

Controls pumps based on locally monitored discharge pressure sensor or remotely monitored tank level.



Well Pump Station

Controls pumps based on locally monitored flow rate / pressure / level sensor signal.



Sewage Lift Pump Station

Controls pumps based on both level transmitter and float switch control inputs for primary and back up control.



Well Pump Station

Controls pumps based on pressure/level sensor or remotely monitored tank level.




WWTP Influent or Effluent Pump

Controls pumps based on locally monitored wet well level. Supports both level transmitter and float switch control inputs for primary and back up control.


Custom Scale Ranges

Allows you to scale the controller to precisely display the individualized station's data

Set Points Screen

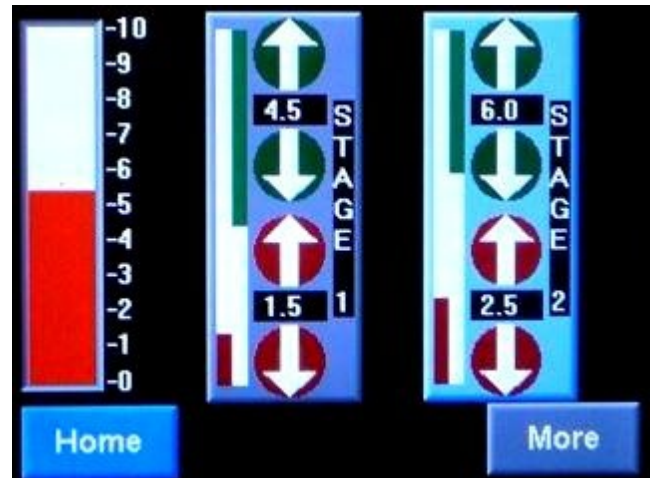

Simulation Screen

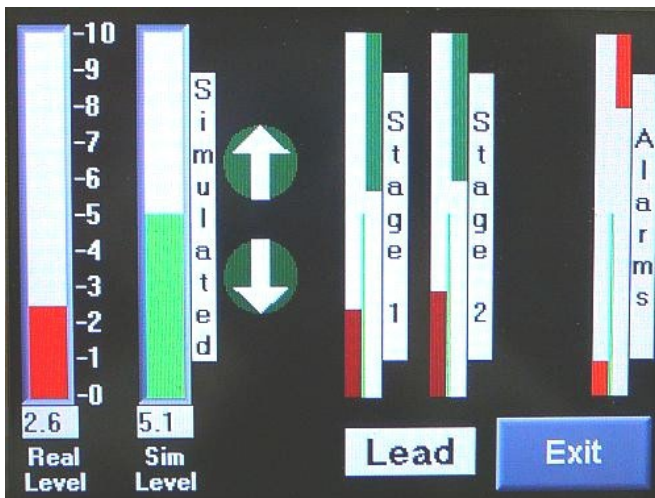

Level Simulation

Two simple up/down keys allows an operator to simulate the level and verify proper operation

Security Protection

- Password Security
- Prevent unauthorized modification of controller variables
- Detect unauthorized station access with a door switch in-put and an operator interface security password
- Activates local alarm and telemeters unauthorized entry to a central monitoring point

Security Screen


Digital Input 0	Normally Open	Change	
P 1 Run	P 1 Auto	P 1 OT	P 1 SF
P 2 Run	P 2 Auto	P 2 OT	P 2 SF
P 3 Run	P 3 Auto	P 3 OT	P 3 SF
Flt Control	Low Float	Off Float	Lead Float
Lag Float	Lag 2 Float	High Float	3 Phase
Cntrl Pwr	Alrm Silnce	Door Sw	Door Ack
Rain Gauge	Gen Run	Gen Alarm	ATS Sw
Pmp Inhibit	P 1 Fail	P 2 Fail	P 3 Fail
Back	Disable	Save	Next

...Intuitive, Secure; Straight-forward interface keeps it simple...


Set-up Wizard Screen

Easy Set-up Wizard

Guides you, step-by-step, through the basic setup of the 1500ct

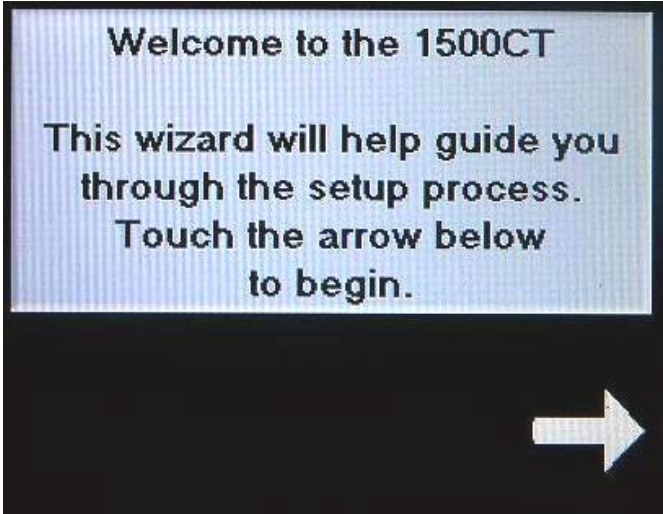

Set-up Wizard Screen; Pump Selection

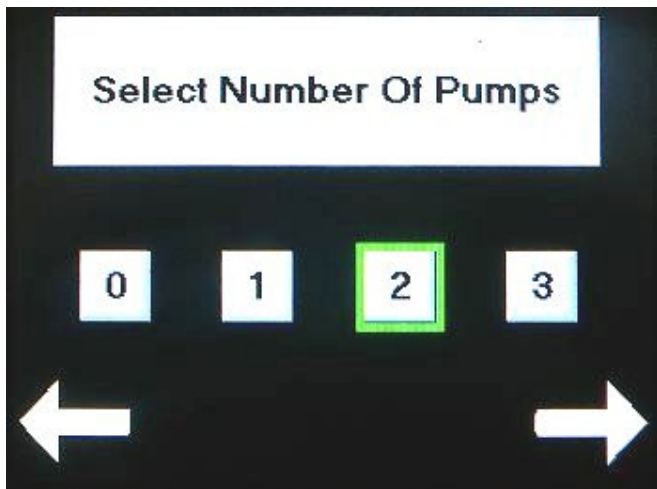

Easy Set-up Wizard, Cont.

- Select number of Pumps
- Choose whether or not pump running inputs and/or pump failure inputs are utilized
- Setup and scale level sensor

Dynamic Inputs / Outputs

- Allows the station to be customized to its specific I/O needs
- Configure 16 inputs from 32 different options
- Configure 10 outputs from 20 different options

Dynamic Digital Input Screen


Digital Input 0	Normally Open	Change	
P 1 Run	P 1 Auto	P 1 OT	P 1 SF
P 2 Run	P 2 Auto	P 2 OT	P 2 SF
P 3 Run	P 3 Auto	P 3 OT	P 3 SF
Flt Control	Low Float	Off Float	Lead Float
Lag Float	Lag 2 Float	High Float	3 Phase
Cntrl Pwr	Alrm Silnce	Door Sw	Door Ack
Rain Gauge	Gen Run	Gen Alarm	ATS Sw
Pmp Inhibit	P 1 Fail	P 2 Fail	P 3 Fail
Back	Disable	Save	Next

...Easy to set-up; Total scalability of Inputs and Outputs

Standard Specifications

Graphic Display Screen	
Display Type	TFT LCD
Colors	256
Display Resolution & Size	320x240 pixels (QVGA), 5.7" active area
Touchscreen	Resistive, analog
Brightness	Adjustable via touchpanel or software
HMI Displays	1024 displays, 500 images per application
Program	
Application Memory	Application Logic: 2MB, Images, 6MB, Fonts: 1MB
Scan Time	9µsec per 1K of typical application
Memory Bits (coils)	4096
Memory Integers (registers)	2048
Long Integers (32 bit)	256
Double Word (32 bit unsigned)	64
Memory Floats	24
Timers	192
Counters	24
Data Tables	120K dynamic data, 192K fixed data
Communication	
RS232/RS485	2 isolated ports, Select RS232 or RS485 via DIP switch
Ethernet	1 port (optional; available separately)
CANbus	1 isolated port
CANopen	CANopen Master, supports PDO, SDO, NMT. CiA DS 301
UniCAN	Multi-master CANbus
MODBUS	Supports MODBUS protocol, Master/Slave
Allen-Bradley DF1	Supports DF1 protocol, Half-duplex Slave
GSM	SMS messages to/from any quantity of phone numbers. Supports programming and data acquisition
GPRS	Use a GPRS modem to establish a data connection via Internet, and transmit IP packets of data over the cellular network, SMS-enabled
General	
PID	Up to 20 independent PID loops, including internal auto-tune, ramp-soak program and bumpless transfer
Info Mode	Troubleshoot, view, and edit system data in real-time - directly from the HMI panel via built-in info mod screens. Supported by remote access
Power Supply	24VDC nominal; 20.4 - 28.8VDC permissible range
Battery back-up	7 years typical at 25°C, back-up for all memory sections & real-time clock (RTC). External battery replacement
Environment	IP65/NEMA4X (for panel, when mounted)
Expansion option	Up to 128 additional I/Os, via plug-in expansion modules (number may vary according to expansion model)
Dimensions	197 x 146.6 x 68.5 mm (7.75" x 5.77" x 2.7")
Standard Snap-in I/O Module	
Digital Inputs (Isolated)	16 (sixteen) pnp/npn Inputs; 24VDC
High-speed (counter) Inputs*	2 (two) 10 kHz pnp/npn Inputs
Analog Inputs	2 (two) 10-bit Inputs; 0-10V, 0-20mA, 4-20mA
Temperature Measurement	Internal
Digital Outputs (Isolated)	4 (four) pnp/npn Outputs; 24VDC
High-speed (PWM) Outputs	2 (two) Transistor Outputs are high-speed outputs; 50 kHz for npn / 2 kHz for pnp
Relay Outputs (Isolated)	10 (ten) SPST-NO relay; 230VAC / 24VDC; 5A resistive; 1A inductive
Analog Outputs	2 (two) 12-bit Outputs, 0-10V, 0-20mA, 4-20mA

* Certain digital inputs can function as high-speed counters, shaft-encoder inputs, frequency measurers

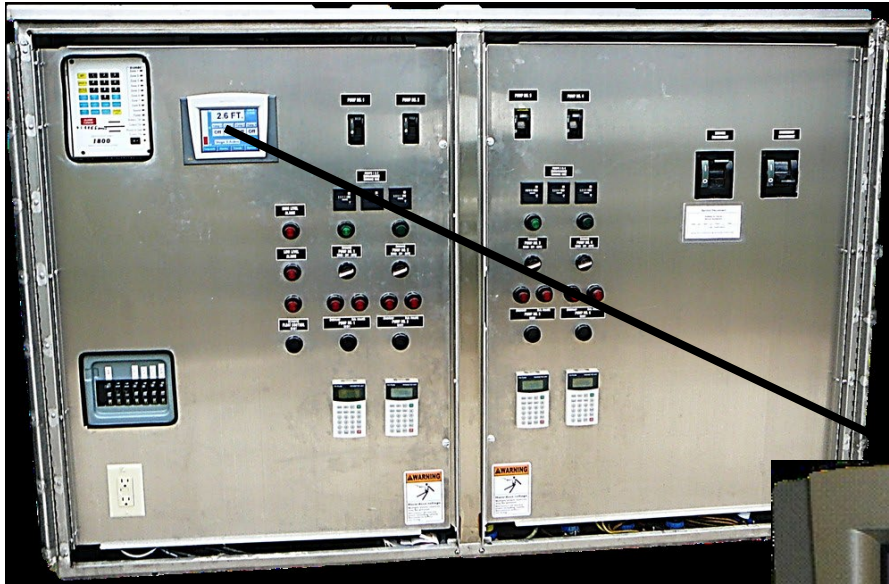

Control, Instrumentation, Telemetry, SCADA, & Automation

For additional information on the above products and all your pumping needs contact:

Pat Malay

Cell: (952) 292-6009
Email: pat@qfsi.net

Kevin Huson

Cell: (952) 292-6008
Email: kevin@qfsi.net

Bill Toennes

Cell: (612) 868-8105
Email: bill@qfsi.net

Cory Malay

Cell: (952) 221-9800
Email: cory@qfsi.net

John Tacheny

Cell: (952) 292-5795
Email: john@qfsi.net

Matt Yorks

Cell: (651) 434-5878
Email: matt@qfsi.net

Ben Sollin

Cell: (612) 803-2701
Email: ben@qfsi.net

Brett Marschall

Cell: (952) 290-6295
Email: brett@qfsi.net

T: (952) 758-9445 **Quality Control & Integration, Inc.** www.qfsi.net/qci

800 6th St NW New Prague, MN 56071